PERMISSABLE VARIATION ON COMMON FRACTIONAL DIMENSIONS LOCATING FINISHED SURFACES MAY BE PLUS OR MINUS .007 UNLESS OTHERWISE SPECIFIED

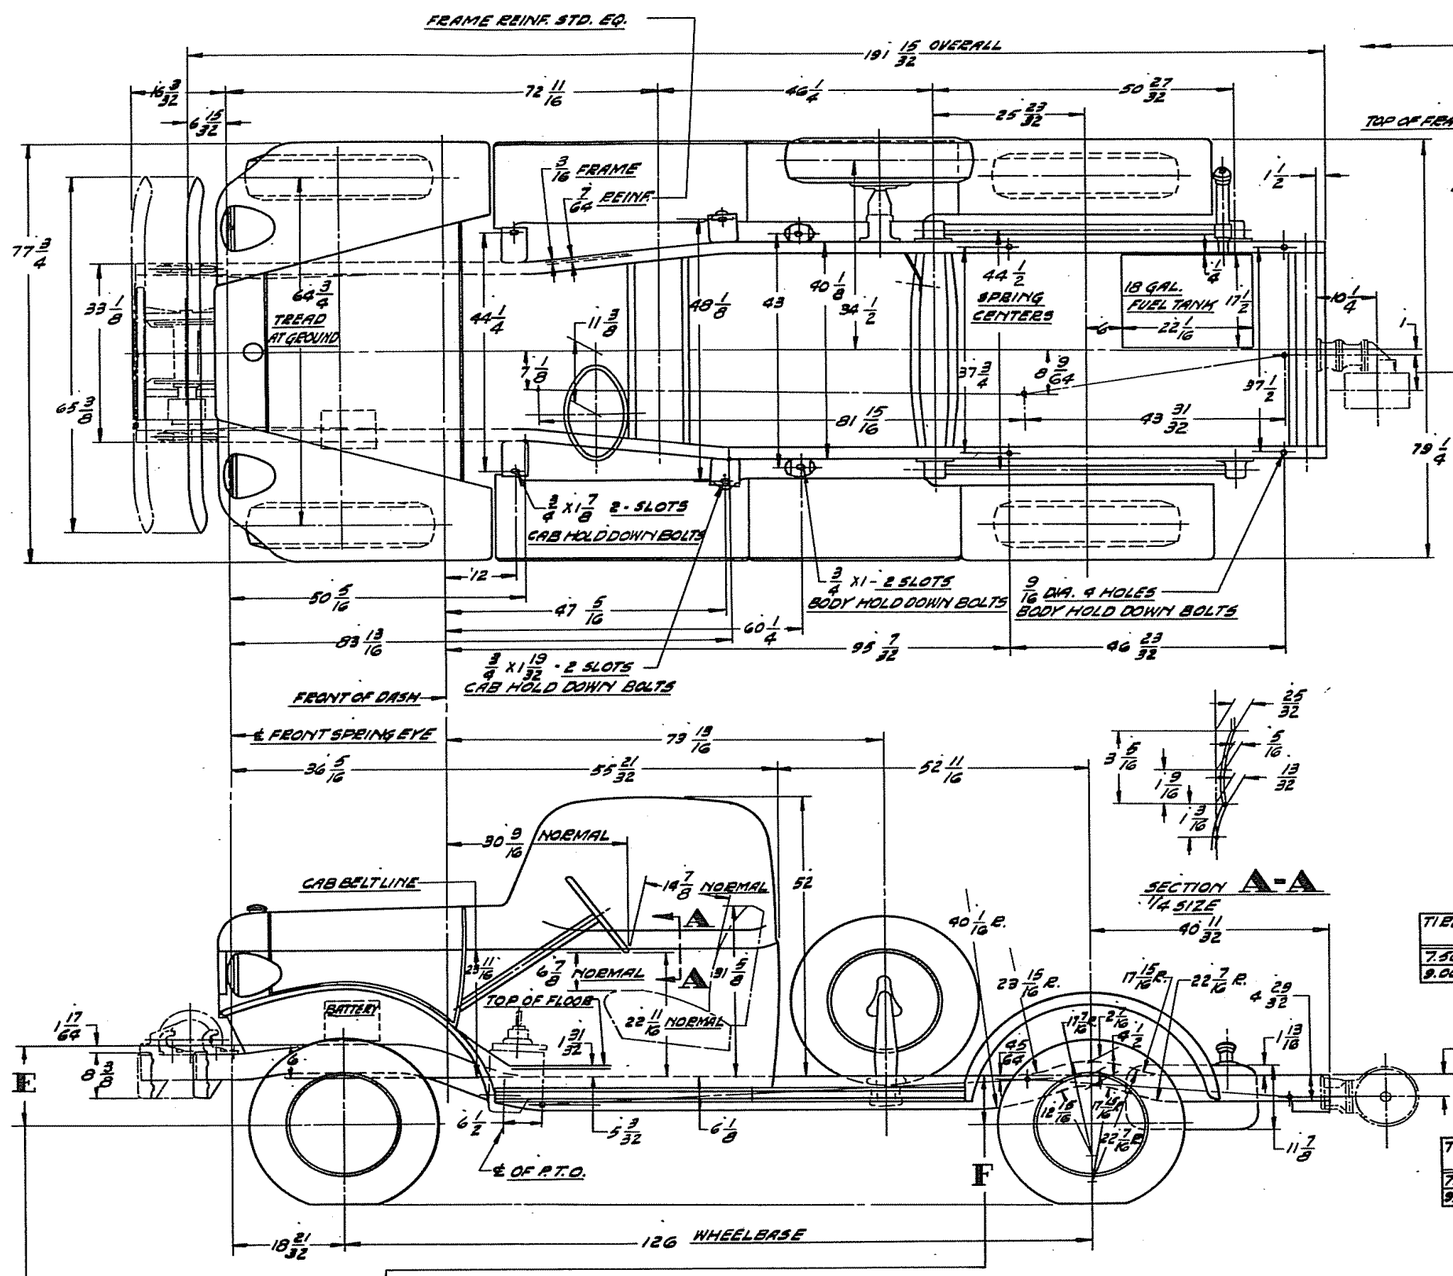

TIRE SIZE (FRONT)	RIM SIZE
7.50-16 8 PLY	16X5.50
9.00-16 8 PLY	16X6.50

TIRE SIZES (REAR)	RIM SIZE	A	B	C RIGHT	C LEFT	D
7.50-16 8 PLY	16X5.50	29 9/32	14.71	7 23/32	9 7/16	9 1/2
9.00-16 8 PLY	16X6.50	27 7/16	16.52	9 23/32	10 7/16	4 MIN.

E	FRONT SPRING		
	LOAD LBS. PER SPRING	RATE LBS. PER INCH	SPRING NO
14 23/32	1110	330-370	10905-70

F	REAR SPRING		
	LOAD LBS. PER SPRING	RATE LBS. PER INCH	SPRING NO
9 11/16	2500	455-523	1189425

BODY BUILDERS LAYOUT

P.W. 126—126" W.B. POWER WAGON